


BiSlide Lead Screw Torque/Load*

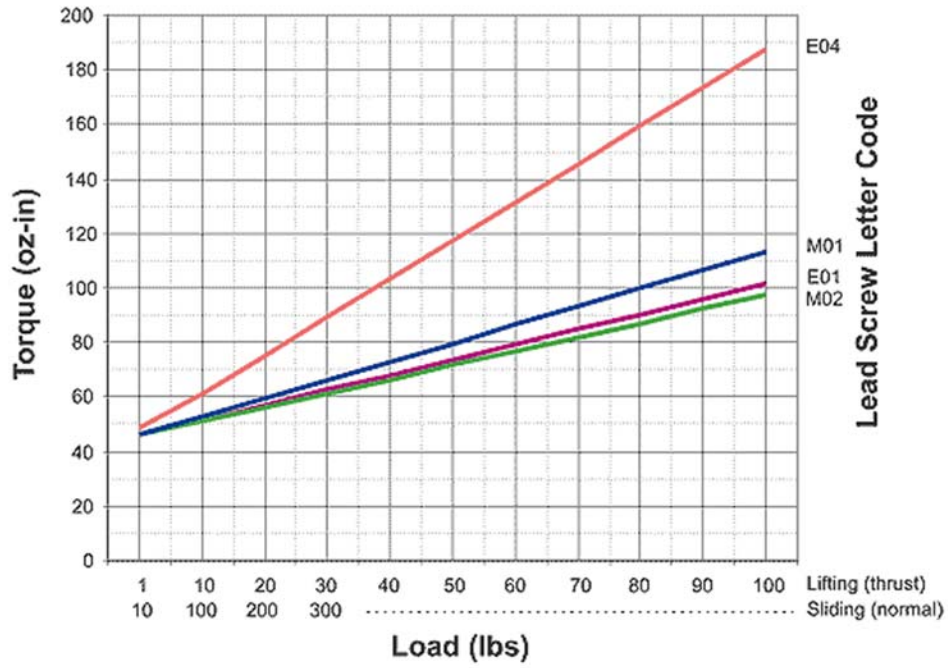

* Add 35 oz-in for Parallel Coupled, 1.5x torque for dynamic safety margin, 2x torque needed for startup