UniSlide® Linear Assembly Dimensional Drawings

Motorized MA15 Series UniSlide

Top View

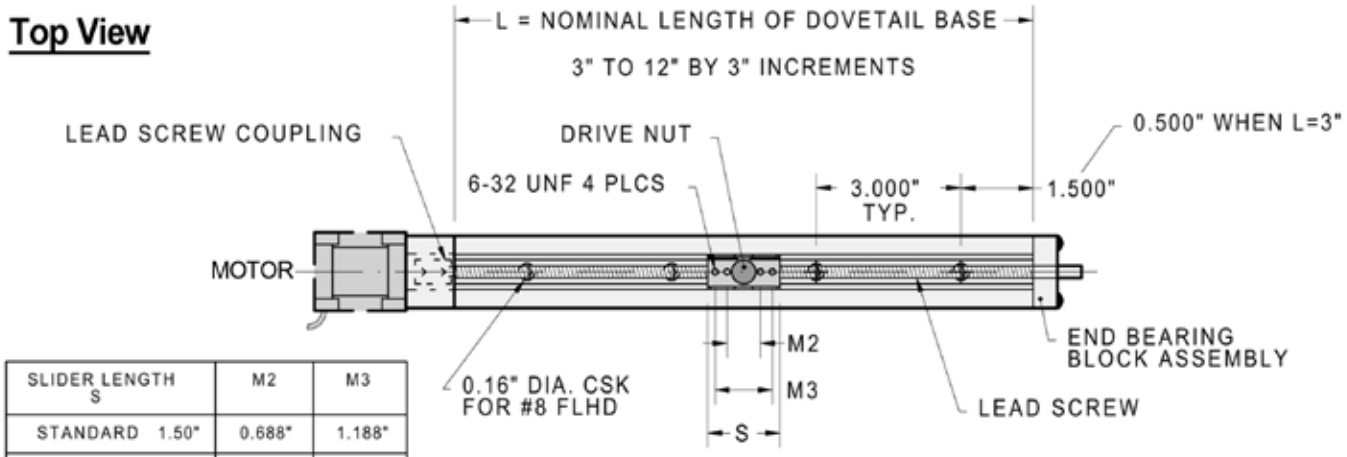

SLIDER LENGTH S	M2	M3
STANDARD 1.50"	0.688"	1.188"
OPTIONAL 2.00"	1.188"	1.688"
OPTIONAL 3.00"	1.188"	2.688"

LEAD SCREW EXTENTIONS:

0.50" X 0.219" DIA. FOR B/P20 LEAD SCREW
" 0.231" DIA. FOR C/P40 LEAD SCREW
" 0.250" DIA. FOR K1,K2/Q1,Q2 LEAD SCREW

Side View

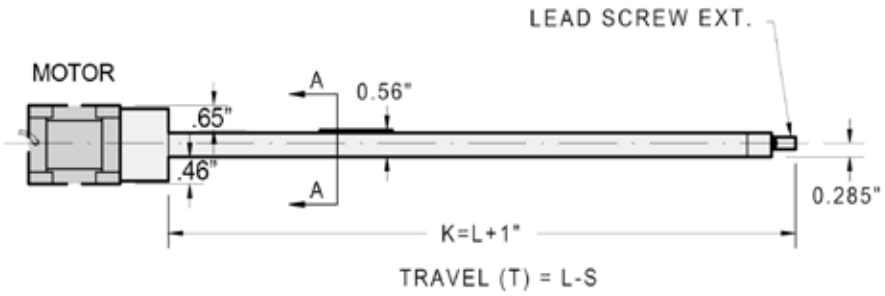

End View A-A



VELMEX, INC.™
Positioning Systems for Science and Industry

Velmex, Inc.
7550 State Routes 5 & 20
Bloomfield, NY 14469-9389

TF: 1.800.642.6446
P: +1.585.657.6151
F: +1.585.657.6153

www.velmex.com
info@velmex.com

Motorized MA25 Series UniSlide

Top View

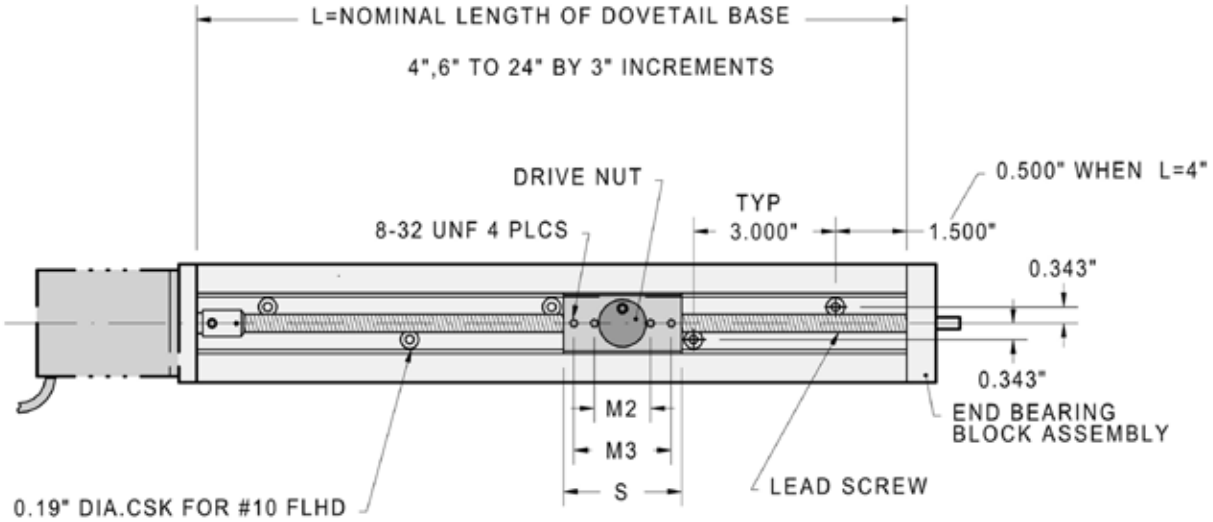

Side View

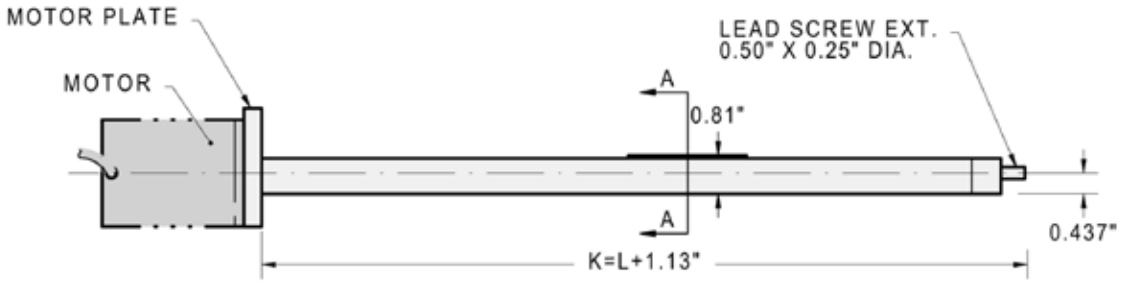

End View A-A



SLIDER LENGTH S	M2	M3
STANDARD 2.50"	1.188"	2.062"
OPTIONAL 3.00"	2.062"	2.562"
OPTIONAL 4.00"	2.062"	3.562"

TRAVEL (T) = (L-S) -1.0"

Motorized MA40 Series UniSlide

Top View

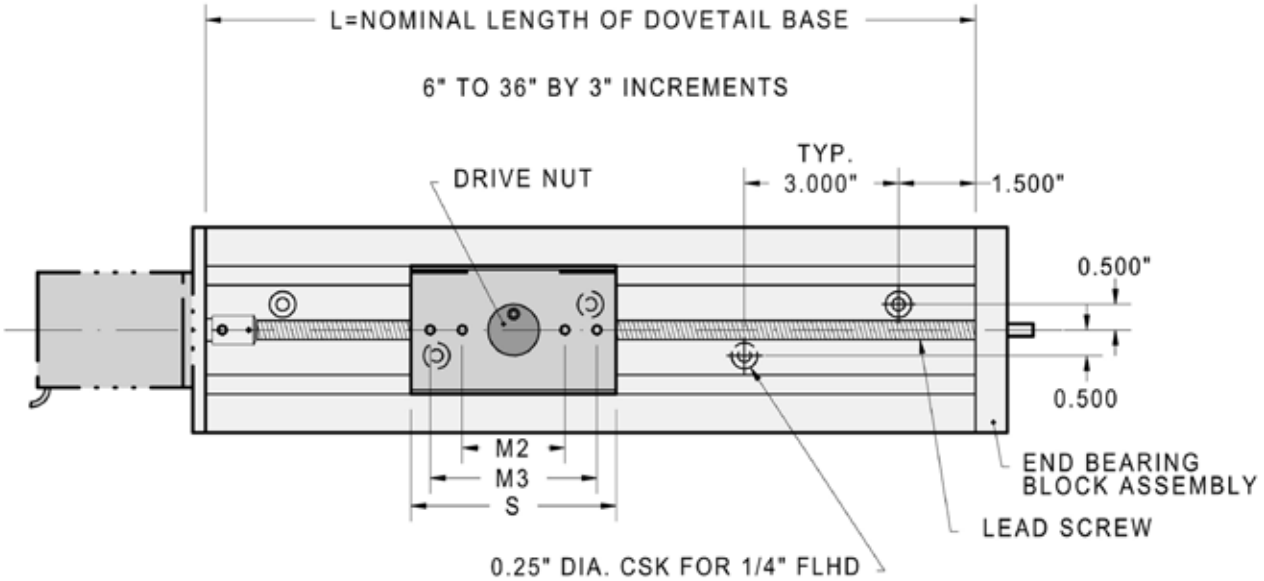

Side View

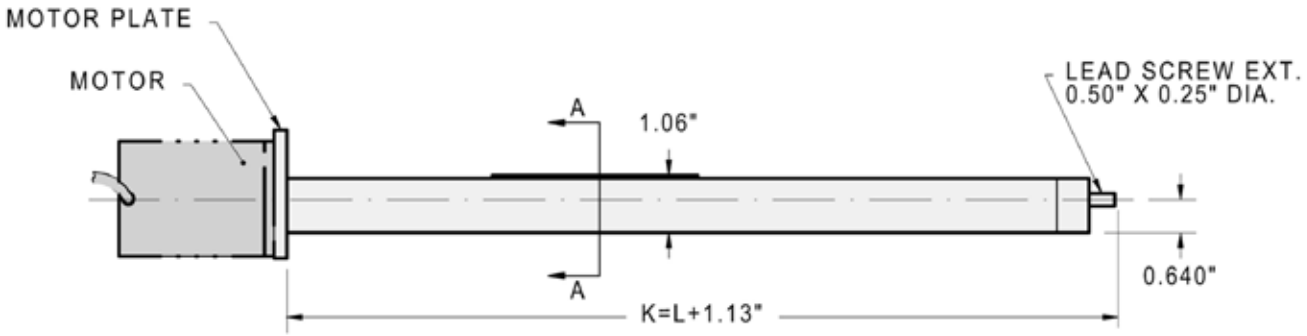

End View A-A



SLIDER LENGTH S	M2	M3
STANDARD 4.00"	2.000"	3.250"
OPTIONAL 6.00"	3.250"	5.250"

TRAVEL (T) = (L-S) -1.0"

Motorized MA60 Series UniSlide

Top View

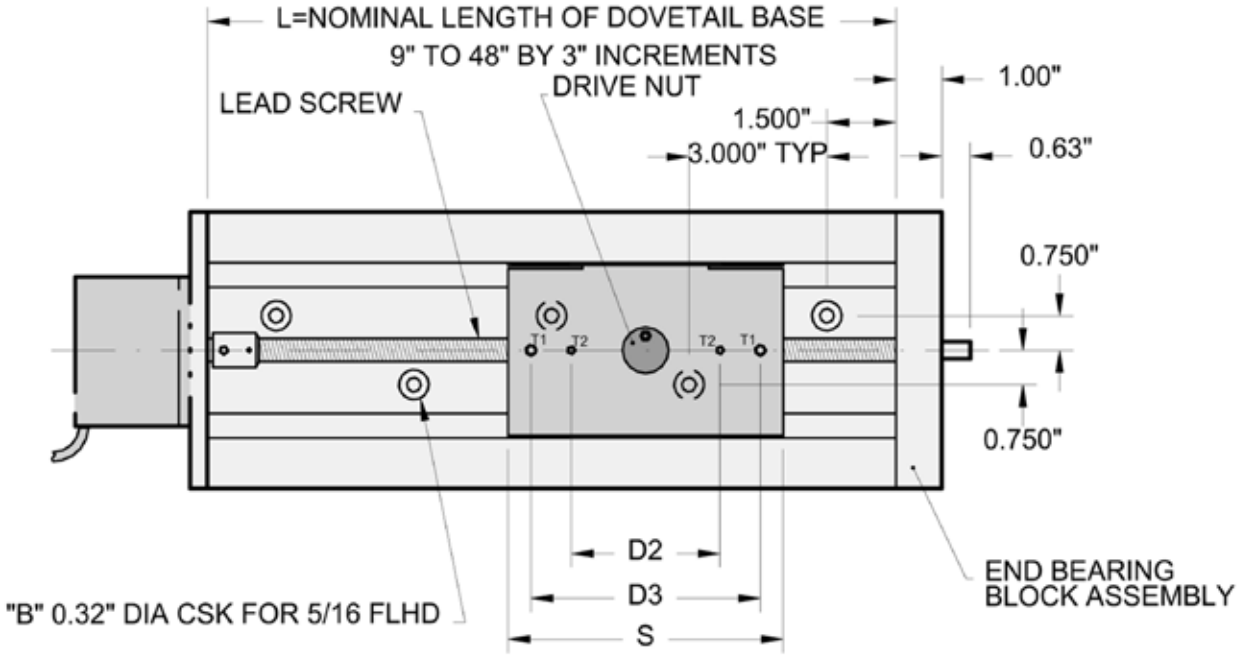

Side View

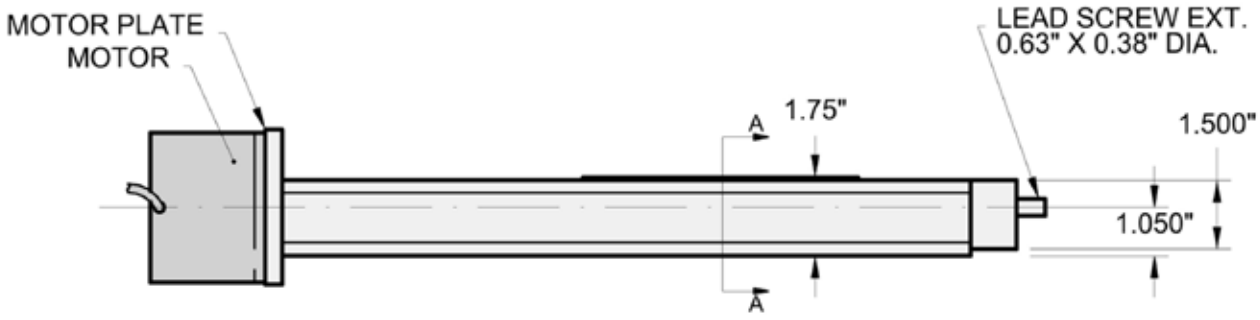

End View A-A

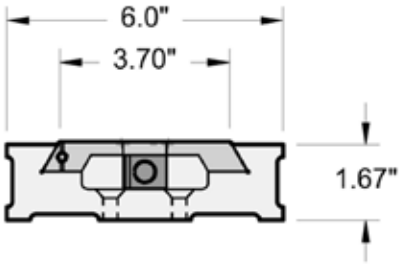

SLIDER LENGTH S		D2	D3	T1	T2
STANDARD	6.00"	3.250"	5.000"	1/4-20	10-32
OPTIONAL	8.00"	5.000"	7.000"	1/4-20	1/4-20

TRAVEL (T) = (L-S) -1.0"

Motorized MB90 Series UniSlide

Top View

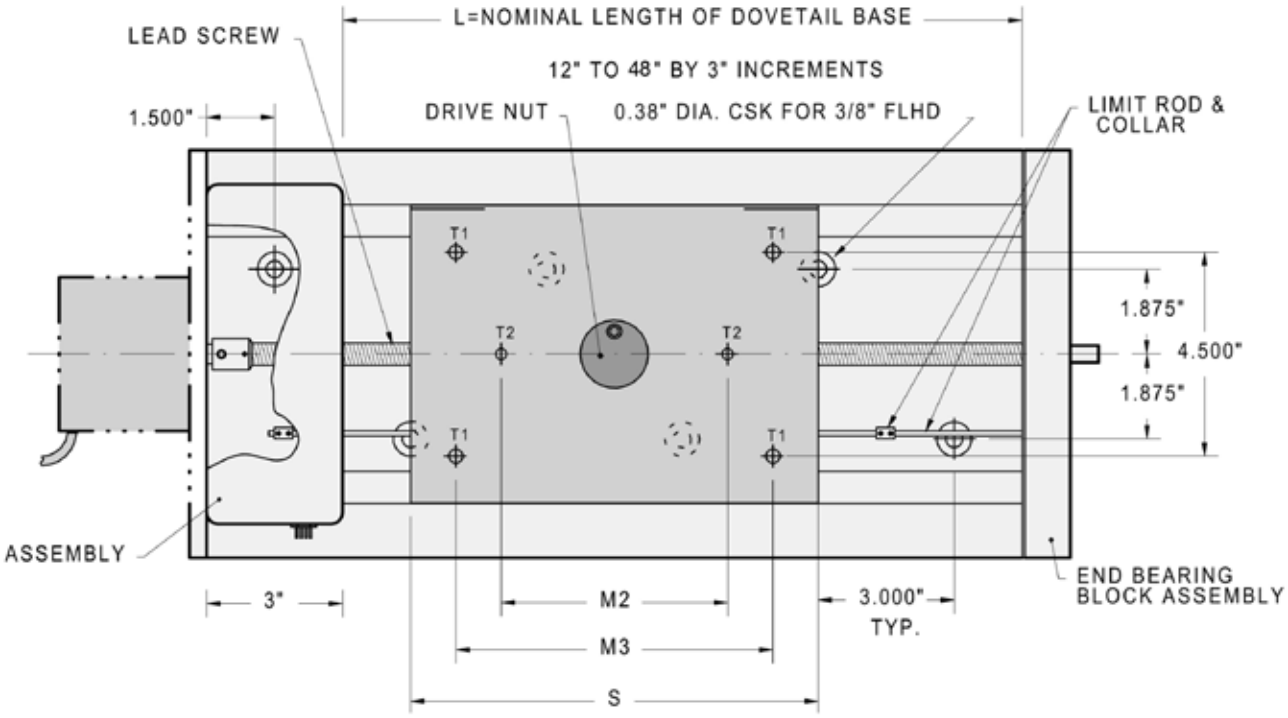

Side View

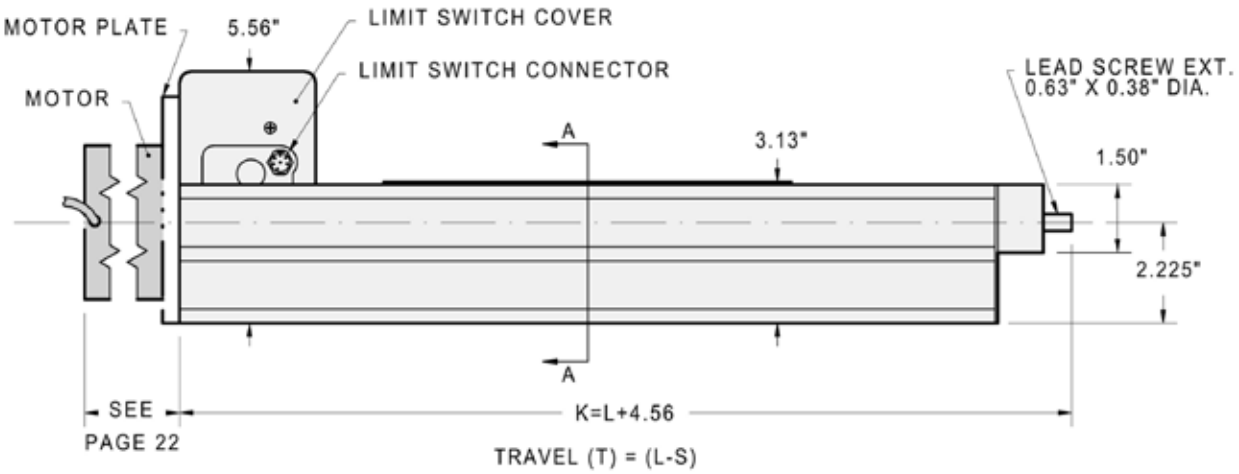

SLIDER LENGTH S	M2	M3	T1	T2
STANDARD 9.00"	5.000"	7.000"	5/16-18	1/4-20
OPTIONAL 12.00"	5.000"	10.000"	5/16-18	1/4-20

Motorized MB90 Series UniSlide - con't

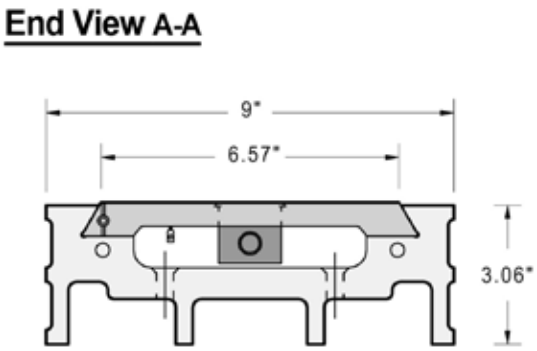

A motorized UniSlide Assembly

Motorized UniSlide Cross-Section Comparison

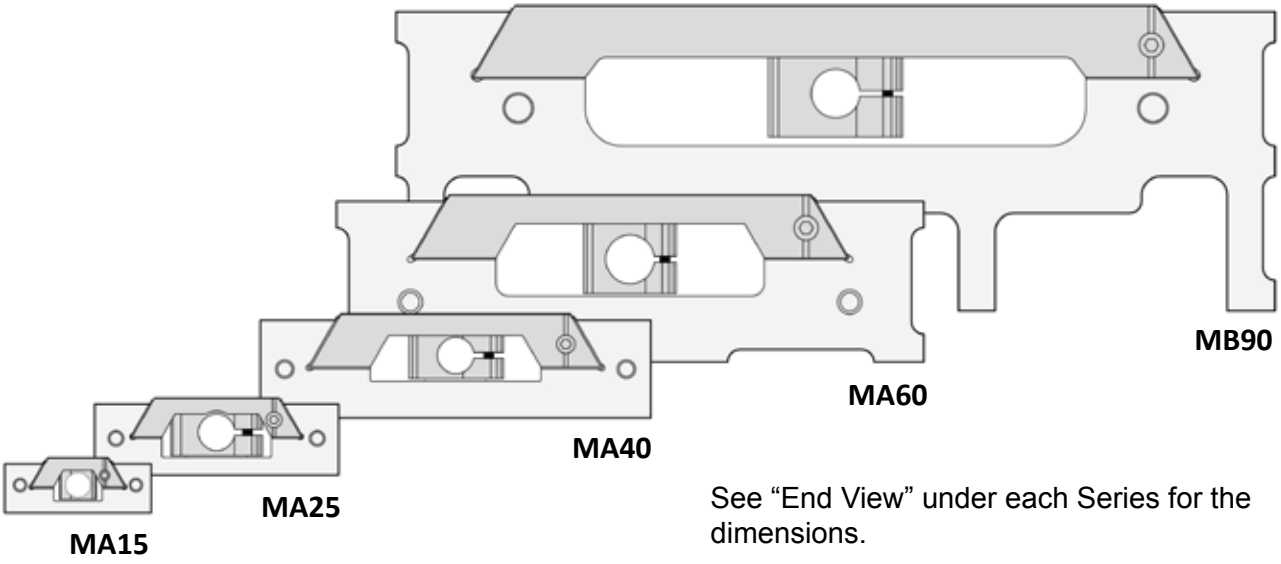

See "End View" under each Series for the dimensions.

Note: Dimensions of the motors can be found with the motor specifications.

Velmex, Inc.
7550 State Routes 5 & 20
Bloomfield, NY 14469-9389

TF: 1.800.642.6446
P: +1.585.657.6151
F: +1.585.657.6153

www.velmex.com
info@velmex.com